Illinois Wesleyan's Introduction to LaTeX

A guide for students brought to you by the Department of Mathematics

Updated May 21, 2015

22 INCLUDING PICTURES 19

23 TABLES 20

Acknowledgements

Much of the material in this document is modeled after An Introduction to Using TEX in the Harvard Mathematics Department, which can be found at http://www.math.harvard.edu/texman/. Many people were involved in the production of this guide. The original idea was presented by Melvyn Jeter, and the original project was carried out under the leadership of Zahia Drici during the 2014-15 academic year. Debbie Gorden designed the document, while Jacob Henry '16, Matt Kellett '16, and Stephen Lachowski '15 did a lot of the supporting technical work. Thanks also to Jinze Zheng '17 for contributing some updates. This is considered a dynamic document, and is overseen by Dan Roberts.

1 THE BEGINNING

We are excited about bringing more students alongside LaTeX and will be outlining basics here. This document will not begin to touch on all the "TEX" services that are available, but it will be a document of "helps" that will hopefully enable you to do class work in "TEX". At the very least these notes should enable you to typeset most coursework assignments. Feel free to ask others for help. Everyone has learned a trick or two and are typically willing to share what they have learned. If you are so inclined you may refer to books on LaTeX that describe fancier techniques. Also, online resources can be very helpful.

2 SOME HISTORY

During the summer of 1978, Donald Knuth developed his first version of "TEX:" In 1989, he released new versions of "TEX" and METAFONT. The science of programming languages continues to grow rapidly. Since the source code of "TEX" is essentially in the public domain other programmers are allowed and encouraged to improve the system. This free access allows the source code to continuously evolve. However, each one is required to use another name to distribute the modified "TEX:" Donald Knuth's original bare-bones "TEX", which is a very powerful engine, lacked many ready-made useful macros that make typesetting a lot easier for the beginner and the casual user. It is important to note that all the different "TEXs" have been built on top of Knuth's original.

17 SEQUENCES OF EQUATIONS

To get a bunch of equations all lined up nicely, you can do it like this with \eqnarray*:

```
\begin{eqnarray*}
i_w \cdot \psi_v \cdot N_w &=& \psi_w \cdot i_w \cdot N_w\\
&=& \psi_w \cdot i_w \cdot \sum_{\sigma \in G_w} \sigma\\
&=& \psi_w \cdot \sum_{\sigma \in G_w} \sigma\\
&=& i_w \cdot N_w \cdot \psi_w.
\end{eqnarray*}
```

yields

$$
\begin{aligned}
i_w \quad _v \; N_w &= \quad _w \; i_w \; N_w \\
&= \quad _w \; i_w \quad \overset{X}{} \\
&= \quad _w \quad \overset{X}{} \quad ^{2G_w} \\
&= \quad _w \quad \overset{}{} \quad ^{2G_w} \\
&= \; i_w \; N_w \quad _w :
\end{aligned}
$$

A few things to notice are

1. & surrounds the symbol at which the equations are lined up{in this case, the = sign.
2. The lines end with \\, which denotes a carriage return.

Also, note that the means that the equations won't be numbered. So, if one wanted the equations to be numbered, s/he would use

```
\begin{eqnarray}
...
\end{eqnarray}
```

There are many other ways to format your equations. Too many to list here. Please note that they are available to learn online.

18 GETTING STUFF ON TOP OF OTHER STUFF

If you want to make a fraction, use the `\frac` command; `\frac` works on everything contained in a pair of curly brackets, or the entire equation if there is no enclosing pair of curly brackets. For example,

```
$$\lim_{\delta\rightarrow 0} \frac{f(x + \delta) - f(x)}{\delta}$$
```

gives

$$\lim_{\delta \rightarrow 0} \frac{f(x + \delta) - f(x)}{\delta}$$

19 BRACKETING

You can get all different kinds of sizes of parentheses, brackets, curly brackets, etc. to make your formulas look good. Typing

```
$$ \Biggl( \biggl( \Bigl( \bigl( () \bigr) \Bigr) \biggr) \Biggr) $$
```

gives you

$$\Biggl(\biggl(\Bigl(\bigl(() \bigr) \Bigr) \biggr) \Biggr)$$

Analogous commands work for `[` and `\{`. Note the `\` used to get curly braces.

You can also let TEX figure out how big a pair of parentheses should be to fit the contained expression. Use `\left(` and `\right)`, like this:

```
$$ \left( \sum a_i^2 \right)^{1/2} $$
```

gives

$$\left(\sum a_i^2 \right)^{1/2}$$

Of course, you can also use `\left[, \right], \left\{` and `\right\}`.

20 MATRICES

Generating matrices is similar to the process of constructing tables. New rows are made by typing two backslashes, `\\`, while new columns are made using the ampersand (`&`). For example,

```
$$
\begin{matrix} 1 & 0 & 0\\
0 & 1 & 1\\
```

```
0 & 0 & 1
\end{matrix}
$$
```

yields

$$\begin{matrix} 1 & 0 & 0 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{matrix}$$

Note, however, that no delimiters are present. Parentheses, square brackets, and absolute value bars may be added quickly by replacing "matrix" with "pmatrix," "bmatrix," or "vmatrix." Consider the following examples:

```
$$
\begin{matrix}
\begin{pmatrix}
1 & 0 & 0\\
0 & 1 & 1\\
0 & 0 & 1
\end{pmatrix}
&&& \begin{bmatrix}
1 & 0 & 0\\
0 & 1 & 1\\
0 & 0 & 1
\end{bmatrix}
&&&
\begin{vmatrix} 1 & 0 & 0\\
0 & 1 & 1\\
0 & 0 & 1
\end{vmatrix}}
\end{matrix}
$$
```

yields

$$\begin{matrix} \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{pmatrix} &&& \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{bmatrix} &&& \begin{vmatrix} 1 & 0 & 0 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{vmatrix} \end{matrix}$$

Binomial coefficients: You might be tempted to think that this is the only way to generate certain expressions, such as the binomial coefficient. In this case, you can simply use the commands `\binom{n}{k}` or `{n\choose k}` (or `\dbinom{n}{k}` for display mode). Both commands generate $\binom{n}{k}$.

In some contexts, it is useful to denote high-order matrices by truncating some of the entries. If, for instance, you wanted to display the nth order identity matrix, you may wish to omit unnecessary lines of commands rather than type n lines of zeros and ones by using ellipses.

$$\begin{matrix} 1 & 0 & \cdots & 0 \\ 0 & 1 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & 1 \end{matrix}$$

The above matrix was generated with the following code.

```
$$
\begin{matrix}
1 & 0 & \cdots & 0\\
0 & 1 & \cdots & 0\\
\vdots & \vdots & \ddots & \vdots\\
0 & 0 & \cdots & 1
\end{matrix}
$$
```

Another matrix environment you may wish to use gives the user the ability to put label the borders of a matrix, much like labeling rows and columns in a table.

21 CASE STATEMENTS

To get a case statement like:

$$x_\lambda = \begin{cases} x & \text{if } \lambda \text{ is an eigenvalue;} \\ x & \text{if } -\lambda \text{ is an eigenvalue;} \\ 0 & \text{otherwise.} \end{cases}$$

type

```
$$
x_ \lambda =
\begin{cases}
x & \text{if $\lambda$ is an 89.9Svlue;
0- & \text{if $-134lambda$ is an 89.9Svlue;
```

22 INCLUDING PICTURES

Many different file types can be accommodated by LaTeX. As mentioned in Section 7, the `graphicx` package allows for a wide variety of files to be included in your document. Assuming that we have included the command `\usepackage{graphicx}` in the preamble of the document, we can use the code

```
\begin{center}
\includegraphics[scale=0.75]{4cube.pdf}
\end{center}
```

to include the file `4cube.pdf` displayed below. The option, `[scale=0.75]`, tells LaTeX to display the file at 75% of its original size.

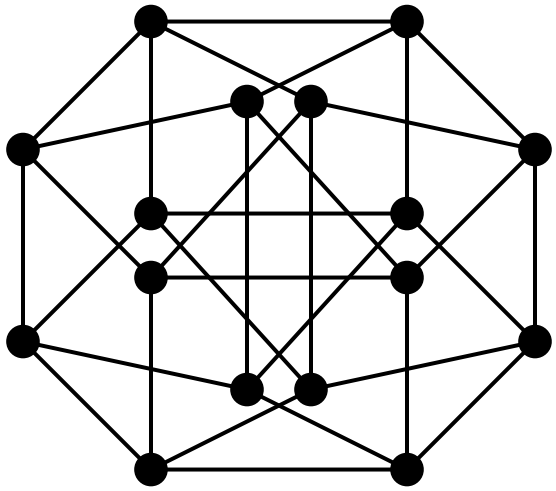

We have a lot of control over the format of the display of the file. The general command `\includegraphics[a1=v1, a2=v2,...,an=vn]{filename}` tells LaTeX to display filename with the given attributes a1; a2; : : : ; an set to values v1; v2; : : : ; vn, respectively. Mutable attributes include `scale, height, width, angle`, etc. For example, if we wish to display the same file as above, but fix the width to be 2 inches, and rotate the graph counter-clockwise by 60 then we would enter the following code.

```
\begin{center}
\includegraphics[width=2in, angle=60]{4cube.pdf}
\end{center}
```

This would display

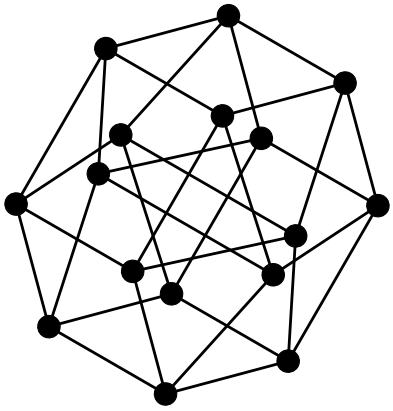

Everything mentioned above for the file extension .pdf will also work for the other filetypes that `graphicx` allows. See Section 7 for a list.

23 TABLES

To generate tables, use the `tabular` environment. For example,

```
nbeginf
```

to be vertical lines between the first and second columns, and after the eighth. The table is enclosed in a `center` environment to center the table as a whole on the page.

The text of the table itself appears after the string specifying the column layout. Entries in the table are separated by the ampersands &, and each row is ended with a carriage return command, `\\`. The `\hline` command produces a horizontal line which runs the width of the table. The tabular environment and its relatives can be used to produce some pretty sophisticated tables; consult the internet for more information.